

MOTORIZATION

LuXout Pulse Hub & App



LUXOUT AUTOMATE™ PULSE HUB & APP



SERIAL
INTERFACE



REMOTE
ACCESS



TIMERS



SCENES



MANAGE
ROOMS



REMOTE
FREE SETUP



SETUP
WIZARD



MANAGE
LOCATIONS



aMHz
BI-DIRECTIONAL



ARC™ and Automate are registered trademarks of Rollease Acmeda.

MOTORIZATION



LuXout Pulse Hub & App

SPECIFICATIONS

DIMENSIONS

TECHNICAL SPECIFICATIONS

Installation	Desktop or wall-mounted
Power Input	5VDC/1A
Related Current	500mA
Rated Power	<2.5W
Standby Power	<300mA
Wi-Fi Network	802.11 b/g/n - 2.4GHz
Device Control Frequency	433MHz
Radio Coverage	30m for device control (indoors)
Protection Class	IP20
Antenna	Built-in

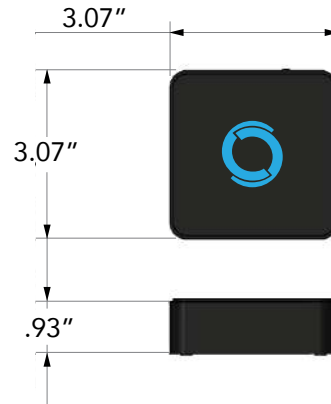

CAPABILITIES

SMART HOME TECHNOLOGY

TECHNICAL CAPABILITIES

Accounts per Hub	5 (1 admin, 4 guests)
Locations per account	5
Devices per Hub	20
Hubs per location	5
Rooms per location	20
Scenes per location	20
Timers per location	20

